


PANDUIT P/N	WEIGHT
P16E17M	8.2kg

- NOTES:
- IDENTIFICATION:
 

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	HORIZONTAL, 2U
OUTLET QTY&TYPE:	(16)5-20R
BREAKER QTY&TYPE:	(2) 20AMP, SINGLE-POLE
INPUT VOLTAGE:	100-120VAC
INPUT CURRENT:	30A (24A DERETED)
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	2.9kVA
INPUT PLUG:	NEMA L5-30P
INPUT CORD LENGTH:	3m [10']
  - ACCESSORIES:
    - POCKET GUIDE
    - QTY: (4) M6 X 12 PAN HEAD MACHINE SCREWS
    - QTY: (4) M6 CAGED NUT
  - RoHS COMPLIANT
  - VISIT PANDUIT'S ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
  - MAXIMUM ALLOWABLE INPUT POWER = 2.9kW
  - INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

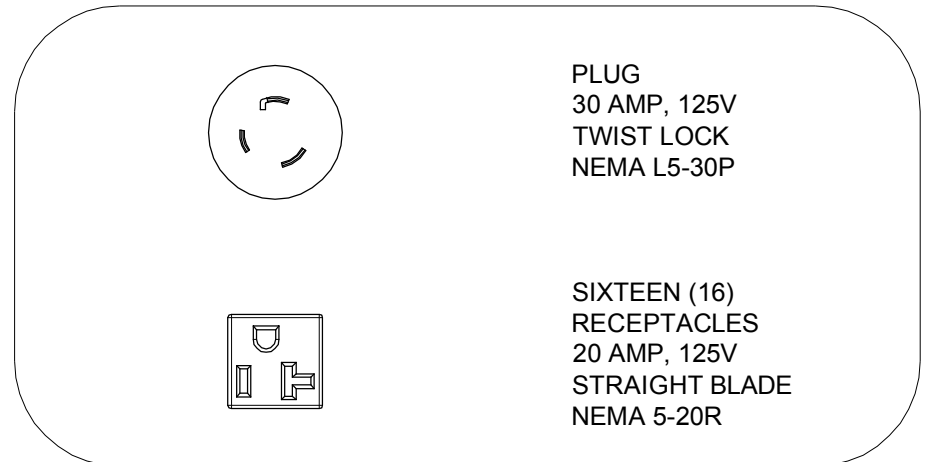

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01A	09/25/2017	WSJ	MIM	EDM	INITIAL RELEASE	P16E17M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P16E17M CUSTOMER DRAWING		
ITEM REVISION NAME		<b>PANDUIT</b>
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<4<50 ±0.5 50<4<250 ±1.0 250<4<500 ±1.5 500<4<1000 ±2.5 1000<4<2000 ±4.0		DRAWING NUMBER: P16E17M_DC
THIRD ANGLE PROJECTION	DRAWN BY: WSJ	SCALE: NONE
	DATE: 09/25/2017	CHK: SEAN
		SHT 1 OF 1
		SCALE: B