

Data sheet for SIMOTICS S-1FK2



Figure similar

MLFB-Ordering data

1FK2104-6AF10-0MA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Basic motor data		Mechanical data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP64	Design acc. to Code I	IM B5 (IM V1, IM V3)
Motor type	High Dynamic	Vibration severity grade	Grade A
Static torque	3.20 Nm	Shaft height	40
Static current	3.0 A	Flange size (AB)	80 mm
Maximum torque	10.00 Nm	Centering ring (N)	70 mm
Maximum current	10.9 A	Hole circle (M)	90 mm
Maximum speed	7200 rpm	Screw-on hole (S)	6.5 mm
Rotor moment of inertia	0.00008400 kgm ²	Overall length (LB)	188 mm
Weight	4.2 kg	Diameter of shaft (D)	19 mm
		Length of shaft (E)	40 mm
		Length of flange diagonal (P)	105 mm
		Shaft extension	Plain shaft
		Color of the housing	Standard (Anthracite, similar to RAL 7016)

Rated data

SINAMICS S210, 3AC 400V

Rated speed	3000 rpm
Rated torque	3.20 Nm
Rated current	3.0 A
Rated power	1.00 kW

Encoder system

Encoder system	Encoder AM22DQC: Absolute encoder 22 bit + 12 bit multiturn
----------------	---

Motor connection

Connection type	OCC for S210
Connector size	M17

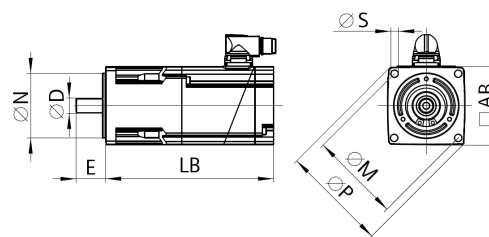


Figure similar



Figure similar

MLFB-Ordering data 1FK2104-6AF10-0MA0

Holding brake

Holding torque 3.30 Nm

Opening time 50 ms

Closing time 15 ms

Maximum single switching energy ¹⁾ 270.0 J

Service life, operating energy 120000 J

Holding current 0.2 A

Break-induced current for 500 ms ²⁾ 1.2 A

¹⁾ Up to three consecutive emergency stops and up to 25% of all emergency stops as a W_{max} high energy stop possible.

²⁾ Typical value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.