

Metal Strapping System

Mechanical fastening applications demand high quality systems that can withstand harsh environments while maintaining a safe and secure physical infrastructure. Severe weather, intense UV rays, high vibration, and galvanic corrosion are all variables that can sacrifice performance and create safety hazards. StrongHold™ offers innovative solutions that provide reliable fastening of critical components which allows businesses to minimize risk and enhance productivity.

The StrongHold™ Metal Strapping System is available in 316L stainless steel to deliver high performance, strength, and reliability, ideal for the Sign and Signal, Oil and Gas, and Industrial markets. Designed to work together in extreme conditions, the StrongHold™ metal strapping, buckles, and installation tool provide secure connections while offering lower installed costs. This system is part of the complete range of harsh environment solutions.



Key Features	Benefits
Smooth Surface and Round Edges	Assures worker safety and bundle protection from abrasion during and after installation
Coil Packaging	Easy to dispense coil packaging
Compatible with industry standard tools	No new installation tools required
Installation Tool	BT75SDT
Robust Design	Heavy duty construction offers a long term service life



Oil and Gas



Mining and Minerals



Sign and Signal



Wastewater Treatment




Shipbuilding



Food and Beverage

Stronghold™ Metal Strapping System

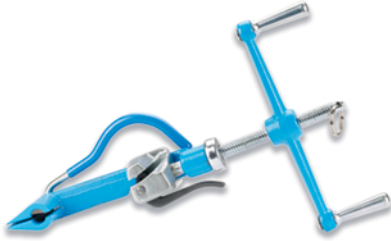


Installation Tool



Type L Buckle



Type E Buckle

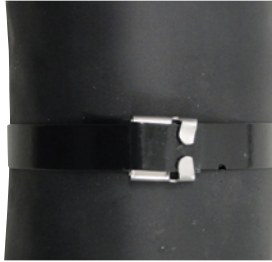

Coated Strapping



Uncoated Strapping

For more information about our StrongHold Metal Strapping offering, visit www.panduit.com

Part Number	Material	Length (m/ft)	Strap Breaking Strength (N/Lbf)	Min Bundle Diameter (mm/in)	Width (mm/in)	Thickness (mm/in)	Recommended Installation Tool	Std Pkg Qty
StrongHold™ Metal Strapping (Uncoated) - Coil								
IMS9.5T35-QR6L	Stainless Steel Type 316L	25/82	1780/400	26/1.02	9.5/0.37	0.35/0.014	BT75SDT	1
IMS12T35-QR6L	Stainless Steel Type 316L	25/82	2445/550	26/1.02	12/0.47	0.35/0.014	BT75SDT	1
IMS16T35-QR6L	Stainless Steel Type 316L	25/82	3110/699	26/1.02	16/0.62	0.35/0.014	BT75SDT	1
IMS19T75-QR6L	Stainless Steel Type 316L	25/82	4225/950	26/1.02	19/0.75	0.75/0.03	BT75SDT	1
StrongHold™ Metal Strapping (Coated with Epoxy Polyester) - Coil								
IMSP9.5T35-QR6L	Stainless Steel Type 316L	25/82	1780/400	26/1.02	9.5/0.37	0.35/0.014 [^]	BT75SDT	1
IMSP12T35-QR6L	Stainless Steel Type 316L	25/82	2445/550	26/1.02	12/0.47	0.35/0.014 [^]	BT75SDT	1
IMSP16T35-QR6L	Stainless Steel Type 316L	25/82	3110/699	26/1.02	16/0.62	0.35/0.014 [^]	BT75SDT	1

[^]Base material less coating (coating thickness 0.05mm-0.15mm per side)

Part Number	Material	Width (mm/in)	Part Description	Std Pkg Qty
StrongHold™ Buckles				
IMSBL9.5-C6L	Stainless Steel Type 316L	9.5/0.37	Individual Buckle Style L for use with 9.5 mm strapping	100
IMSBL12-C6L	Stainless Steel Type 316L	12/0.47	Individual Buckle Style L for use with 12 mm strapping	100
IMSBL16-C6L	Stainless Steel Type 316L	16/0.62	Individual Buckle Style L for use with 16 mm strapping	100
IMSBE19-C6L	Stainless Steel Type 316L	19/0.75	Individual Buckle Style E for use with 19 mm strapping	100

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

©2021 Panduit Corp.
ALL RIGHTS RESERVED.
SSCB40--SA-ENG
6/2021