

Feed Thru Main Modules

Power Mod™

WBT - Feed Thru Mains

Feed thru mains (type WBT) offer the ability to pull conductors in and out of the enclosure for riser cable applications utilizing incoming and outgoing bus connections (including lug provisions). In addition, a breaker is included, that feeds the cross bus for the meter stacks on this floor. Users do not have to utilize any additional tap boxes as lug provisions are already included in the units. This can save the end-user on the material cost of the meter bank as well as providing a disconnect per floor while saving precious wall space. Please see the applications pages for more information.

Features include:


- QuickSystem features
- Incoming & Outgoing PowerMod thru bus
- Standard compression lug capability
- 65K AIC standard, 100K AIC available for all models
- Main breaker with broad ampacity ratings up to 1200A with non-standard amperages available (such as 700, 900, etc...)
- Field installable shunt trip

Feed Thru Mains Quick Reference


- 200 - 1200A (breaker)
- 1200 - 2400A (feed thru)
- 1200 thru-bus rating
- UL Standard #67
- UL file #E27100
- AIC rating (65K & 100K)
- Voltage:
 - Three Phase 240V AC max
- All swing latches and rivets are stainless steel
- NEMA 3R (outdoor)
- G90 Galvanized Steel
- ANSI 61 Paint



Power Mod: Type WBT Feed Thru Main Units

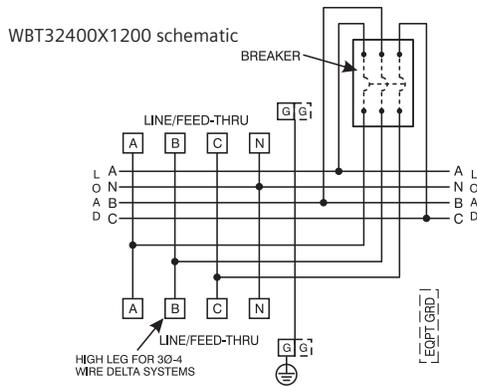

- Connects via lugs and service entrance rated.
- Lug kits not included. (2) Lug kits must be ordered separately per module.

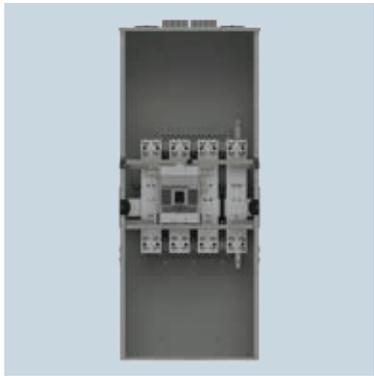


Type WBT Feed Thru Main Units

Catalog Number (65KAIC)	Catalog Number (100KAIC)	Catalog Number (65KAIC) Blank end Wall	Catalog Number (100KAIC) Blank end Wall	Breaker Amperage Rating	Feed Through Bus Rating	Breaker Type	Dimensions (inches) ^①		
							Height	Width	Depth

3-phase, 4-wire SN, 240V AC Max.


WBT312X200	WBT312X200U	WBT312X200NH	WBT312X200UNH	200	1200	JXD6	66.21	27.59	13.30
WBT312X250	WBT312X250U	WBT312X250NH	WBT312X250UNH	250	1200	JXD6	66.21	27.59	13.30
WBT312X300	WBT312X300U	WBT312X300NH	WBT312X300UNH	300	1200	JXD6	66.21	27.59	13.30
WBT312X350	WBT312X350U	WBT312X350NH	WBT312X350UNH	350	1200	JXD6	66.21	27.59	13.30
WBT312X400	WBT312X400U	WBT312X400NH	WBT312X400UNH	400	1200	JXD6	66.21	27.59	13.30
WBT312X450	WBT312X450U	WBT312X450NH	WBT312X450UNH	450	1200	JXD6	66.21	27.59	13.30
WBT312X500	WBT312X500U	WBT312X500NH	WBT312X500UNH	500	1200	LDX6	66.21	27.59	13.30
WBT312X600	WBT312X600U	WBT312X600NH	WBT312X600UNH	600	1200	LDX6	66.21	27.59	13.30
WBT324X700	WBT324X700U	WBT324X700NH	WBT324X700UNH	700	2400	MXD6	79.75	35.55	16.96
WBT324X800	WBT324X800U	WBT324X800NH	WBT324X800UNH	800	2400	MXD6	79.75	35.55	16.96
WBT324X900	WBT324X900U	WBT324X900NH	WBT324X900UNH	900	2400	NXD6	79.75	35.55	16.96
WBT324X1000	WBT324X1000U	WBT324X1000NH	WBT324X1000UNH	1000	2400	NXD6	79.75	35.55	16.96
WBT324X1200	WBT324X1200U	WBT324X1200NH	WBT324X1200UNH	1200	2400	NXD6	79.75	35.55	16.96

① Dimensions subject to changes.

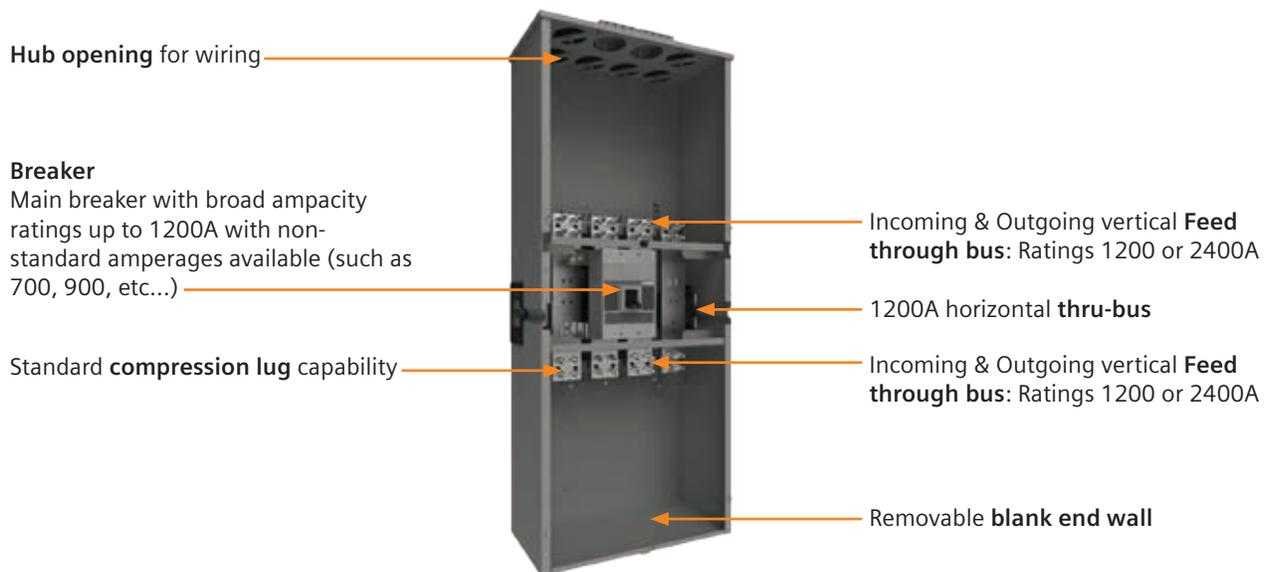

Building A: Method from our competitors

Building B: Method with Siemens exclusive Feed Thru Main

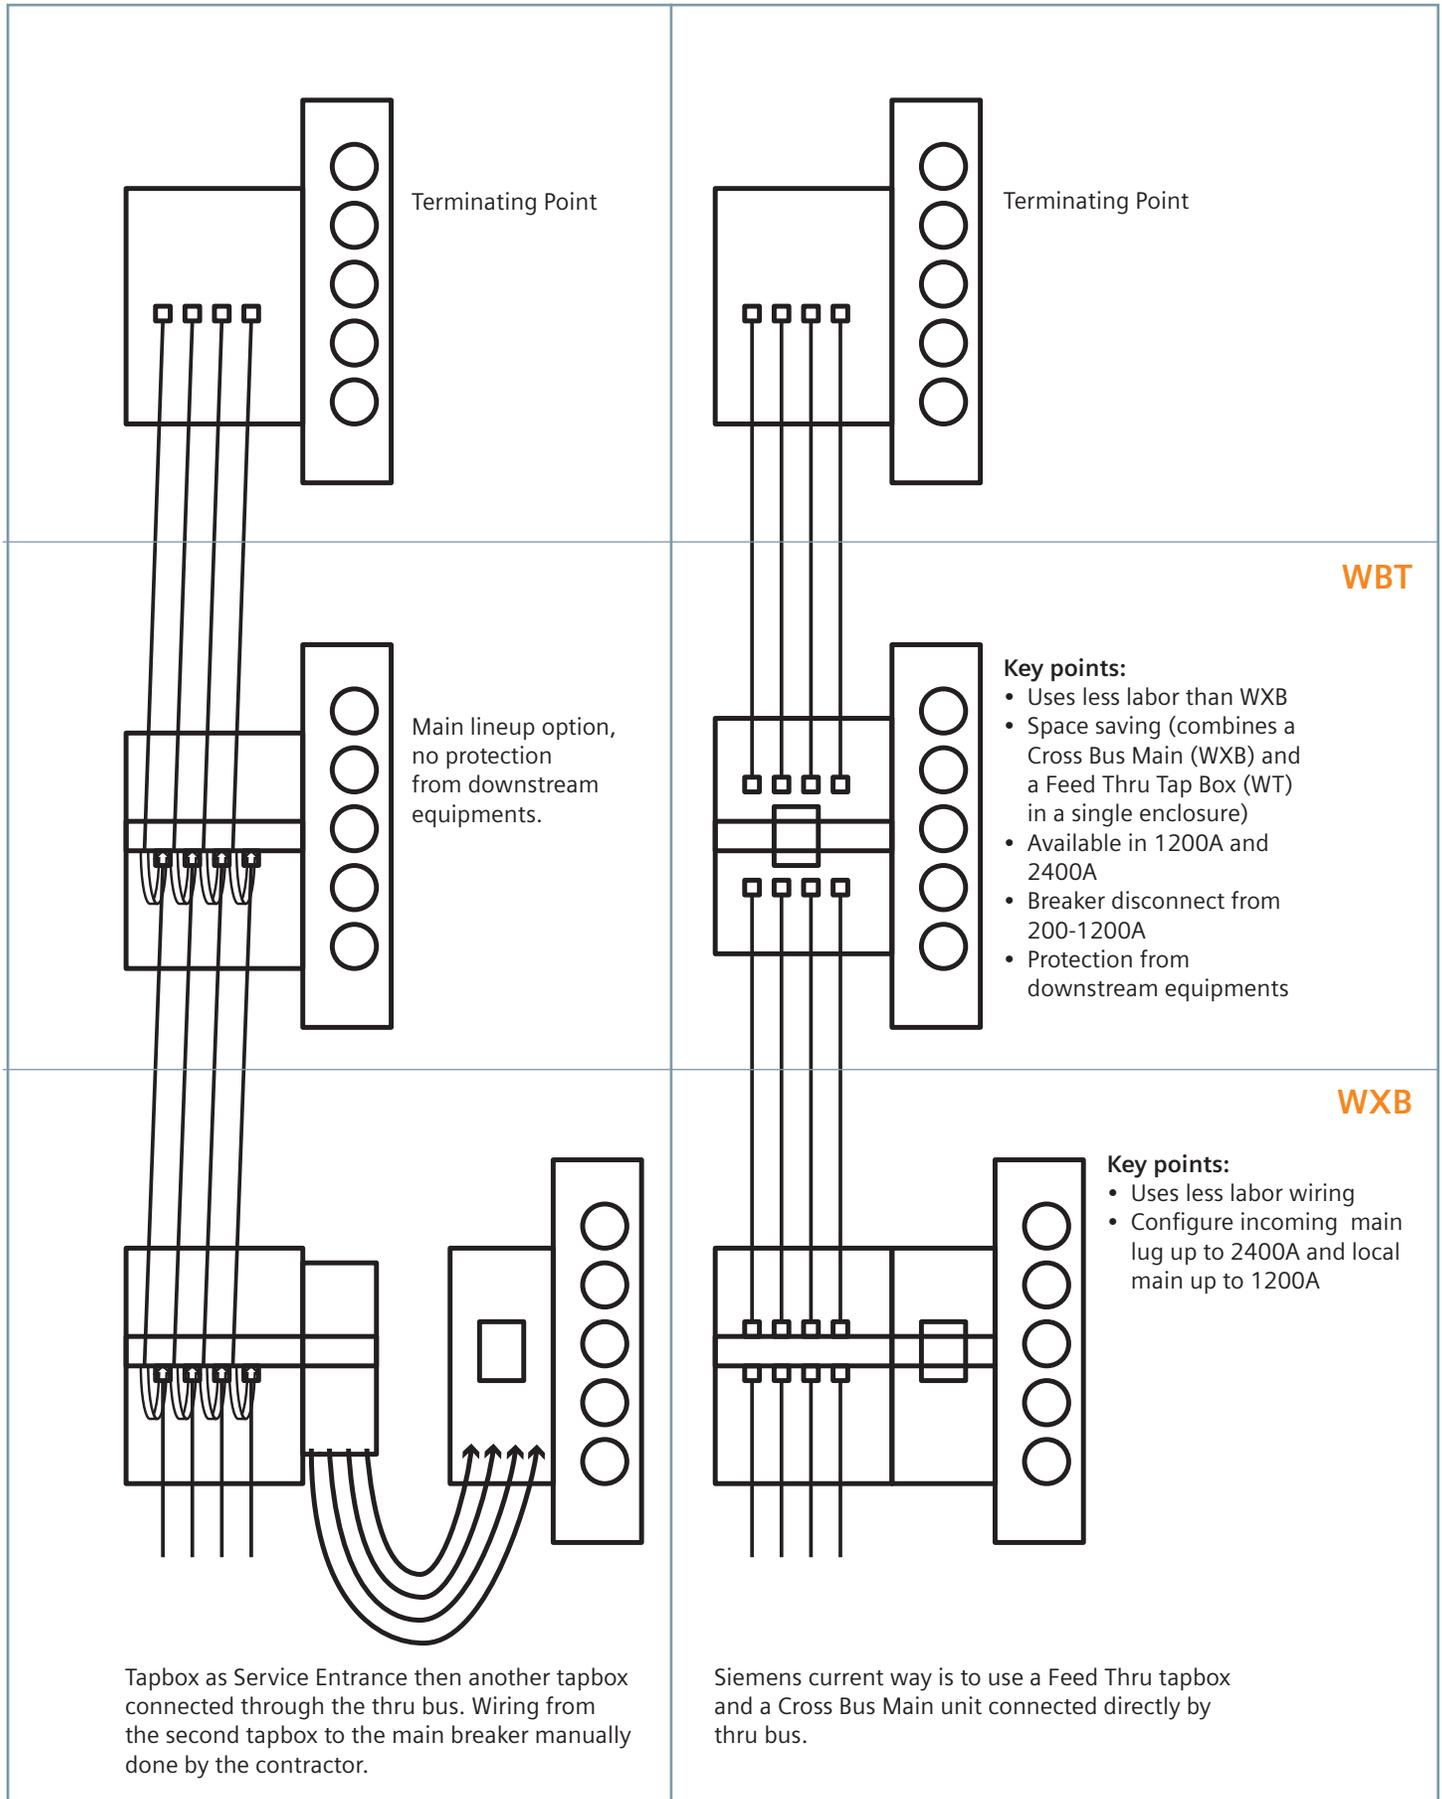

Siemens Industry, Inc.
5400 Triangle Parkway
Norcross, GA 30092

1-800-241-4453
info.us@siemens.com

Subject to change without prior notice
Order No. RPFL-PMFTM-0316
Printed in USA
All rights reserved
© 2016, Siemens Industry, Inc.

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

www.usa.siemens.com/powermod