

SIRIUS soft starter 200-600 V 63 A, 110-250 V AC spring-type terminals Analog output



Product brand name	SIRIUS
Product category	Hybrid switching devices
Product designation	Soft starter
Product type designation	3RW52
Manufacturer's article number	<ul style="list-style-type: none"> • of HMI module usable 3RW5980-0HS00 • of HMI-Modul high-feature usable 3RW5980-0HF00 • of communication module PROFINET standard usable 3RW5980-0CS00 • of communication module PROFIBUS usable 3RW5980-0CP00 • of communication module Modbus TCP usable 3RW5980-0CT00 • of communication module Modbus RTU usable 3RW5980-0CR00 • of communication module Ethernet/IP 3RW5980-0CE00 • of circuit breaker usable at 400 V 3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 • of circuit breaker usable at 500 V 3VA2163-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10 • of circuit breaker usable at 400 V at inside-delta circuit 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 • of circuit breaker usable at 500 V at inside-delta circuit 3VA2110-7MN32-0AA0; Type of coordination 1, Iq = 20 kA, CLASS 10

- of the gG fuse usable up to 690 V
- of the gG fuse usable at inside-delta circuit up to 500 V
- of full range R fuse link for semiconductor protection usable up to 690 V
- of back-up R fuse link for semiconductor protection usable up to 690 V

[3NA3830-6; Type of coordination 1, I_q = 65 kA](#)

[3NA3830-6; Type of coordination 1, I_q = 65 kA](#)

[3NE1022-0; Type of coordination 2, I_q = 65 kA](#)

[3NE8024-1; Type of coordination 2, I_q = 65 kA](#)

General technical data

Starting voltage [%]	30 ... 100 %
Stopping voltage [%]	50 ... 50 %
Start-up ramp time of soft starter	0 ... 20 s
Current limiting value [%] adjustable	130 ... 700 %
Certificate of suitability	
• CE marking	Yes
• UL approval	Yes
• CSA-approval	Yes
Product component	
• is supported HMI-Standard	Yes
• is supported HMI-High Feature	Yes
Product feature integrated bypass contact system	Yes
Number of controlled phases	3
Trip class	CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2
Insulation voltage	
• rated value	600 V
Degree of pollution	3, acc. to IEC 60947-4-2
Impulse voltage rated value	6 kV
Blocking voltage of the thyristor maximum	1 800 V
Service factor	1
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	600 V
Protection class IP	IP00
Usage category acc. to IEC 60947-4-2	AC 53a
Shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Reference code acc. to DIN EN 81346-2	Q
Product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
• Soft Torque	Yes
• Adjustable current limitation	Yes
• pump ramp down	Yes

• Intrinsic device protection	Yes
• motor overload protection	Yes; Electronic motor overload protection
• Evaluation of thermistor motor protection	No
• inside-delta circuit	Yes
• Auto-reset	Yes
• Manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
• communication function	Yes
• operating measured value display	Yes; Only in conjunction with special accessories
• error logbook	Yes; Only in conjunction with special accessories
• via software parameterizable	No
• via software configurable	Yes
• PROFINET	Yes; in connection with the PROFINET Standard communication module
• firmware update	Yes
• removable terminal for control circuit	Yes
• torque control	No
• analog output	Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI)

Power Electronics

Operating current	
• at 40 °C rated value	63 A
• at 50 °C rated value	55.5 A
• at 60 °C rated value	50.5 A
Operating current at inside-delta circuit	
• at 40 °C rated value	109 A
• at 50 °C rated value	96 A
• at 60 °C rated value	87.5 A
Operating voltage	
• rated value	200 ... 600 V
• at inside-delta circuit rated value	200 ... 600 V
Relative negative tolerance of the operating voltage	-15 %
Relative positive tolerance of the operating voltage	10 %
Relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
Relative positive tolerance of the operating voltage at inside-delta circuit	10 %
Operating power for three-phase motors	
• at 230 V at 40 °C rated value	18.5 kW
• at 230 V at inside-delta circuit at 40 °C rated value	30 kW
• at 400 V at 40 °C rated value	30 kW

<ul style="list-style-type: none"> • at 400 V at inside-delta circuit at 40 °C rated value 	55 kW
<ul style="list-style-type: none"> • at 500 V at 40 °C rated value 	37 kW
<ul style="list-style-type: none"> • at 500 V at inside-delta circuit at 40 °C rated value 	55 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative negative tolerance of the operating frequency	-10 %
Relative positive tolerance of the operating frequency	10 %
Adjustable motor current	
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 1 	25.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 3 	30.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 4 	33 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 5 	35.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 6 	38 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 7 	40.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 8 	43 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 9 	45.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 10 	48 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 11 	50.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 12 	53 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 13 	55.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 14 	58 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 15 	60.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 16 	63 A
<ul style="list-style-type: none"> • minimum 	25.5 A
<ul style="list-style-type: none"> • at inside-delta circuit minimum 	44.2 A
Adjustable motor current for inside-delta circuit	
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 1 	44.2 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 2 	48.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 3 	52.8 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 4 	57.2 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 5 	61.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 6 	65.8 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 7 	70.1 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 8 	74.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 9 	78.8 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 10 	83.1 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 11 	87.5 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 12 	91.8 A
<ul style="list-style-type: none"> • at rotary encoding switch on switch position 13 	96.1 A

<ul style="list-style-type: none"> • at rotary encoding switch on switch position 14 • at rotary encoding switch on switch position 15 • at rotary encoding switch on switch position 16 	100 A 105 A 109 A
Minimum load [%]	15 %; Relative to smallest settable Ie
Power loss [W] for rated value of the current at AC	
<ul style="list-style-type: none"> • at 40 °C to power-up • at 50 °C to power-up • at 60 °C to power-up 	31 W 29 W 27 W
Power loss [W] at AC at AC	
<ul style="list-style-type: none"> • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup 	882 W 744 W 659 W

Control circuit/ Control	
Type of voltage of the control supply voltage	AC
Control supply voltage at AC	
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	110 ... 250 V 110 ... 250 V
Relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
Relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
Relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
Relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
Control supply voltage frequency	50 ... 60 Hz
Relative negative tolerance of the control supply voltage frequency	-10 %
Relative positive tolerance of the control supply voltage frequency	10 %
Control supply current in standby mode rated value	30 mA
Holding current in the by-pass mode operating rated value	75 mA
Starting current at close of by-pass contact maximum	2.5 A
Inrush current peak at connect of control supply voltage maximum	12.2 A
Duration of inrush current peak at connect of control supply voltage	2.2 ms
Design of the overvoltage protection	Varistor
Design of short-circuit protection for control circuit	4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply

Inputs/ Outputs	
Number of digital inputs	1

Number of inputs for thermistor connection	0
Number of digital outputs	3
• not parameterizable	2
Digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
Number of analog outputs	1
Switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A

Installation/ mounting/ dimensions

Mounting position	+/- 10° rotation possible and can be tilted forward or backward on vertical mounting surface
Mounting type	screw fixing
Height	306 mm
Width	185 mm
Depth	203 mm
Required spacing with side-by-side mounting	
• forwards	10 mm
• Backwards	0 mm
• upwards	100 mm
• downwards	75 mm
• at the side	5 mm
Installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
Weight without packaging	5.6 kg

Connections/ Terminals

Type of electrical connection	
• for main current circuit	box terminal
• for control circuit	spring-loaded terminals
Width of connection bar maximum	25 mm
Type of connectable conductor cross-sections	
• for main contacts for box terminal using the front clamping point solid	1x (2.5 ... 16 mm ²)
• for main contacts for box terminal using the front clamping point finely stranded with core end processing	1x (2.5 ... 50 mm ²)
• for main contacts for box terminal using the front clamping point stranded	1x (10 ... 70 mm ²)
• at AWG conductors for main contacts for box terminal using the front clamping point	1x (10 ... 2/0)
• for main contacts for box terminal using the back clamping point solid	1x (2.5 ... 16 mm ²)
• at AWG conductors for main contacts for box terminal using the back clamping point	1x (10 ... 2/0)

<ul style="list-style-type: none"> • for main contacts for box terminal using both clamping points solid • for main contacts for box terminal using both clamping points finely stranded with core end processing • for main contacts for box terminal using both clamping points stranded • for main contacts for box terminal using the back clamping point finely stranded with core end processing • for main contacts for box terminal using the back clamping point stranded 	<p>2x (2.5 ... 16 mm²)</p> <p>2x (2.5 ... 35 mm²)</p> <p>2x (6 ... 16 mm²), 2x (10 ... 50 mm²)</p> <p>1x (2.5 ... 50 mm²)</p> <p>1x (10 ... 70 mm²)</p>
Type of connectable conductor cross-sections <ul style="list-style-type: none"> • for control circuit solid • for control circuit finely stranded with core end processing • at AWG conductors for control circuit solid • at AWG conductors for control circuit finely stranded with core end processing 	<p>2x (0.25 ... 1.5 mm²)</p> <p>2x (0.25 ... 1.5 mm²)</p> <p>2x (24 ... 16)</p> <p>2x (24 ... 16)</p>
Wire length <ul style="list-style-type: none"> • between soft starter and motor maximum • at the digital inputs at AC maximum 	<p>800 m</p> <p>100 m</p>
Tightening torque <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	<p>4.5 ... 6 N·m</p> <p>0.8 ... 1.2 N·m</p>
Tightening torque [lbf·in] <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary and control contacts with screw-type terminals 	<p>40 ... 53 lbf·in</p> <p>7 ... 10.3 lbf·in</p>

Ambient conditions

Ambient temperature <ul style="list-style-type: none"> • during operation • during storage and transport 	<p>-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above</p> <p>-40 ... +80 °C</p>
Environmental category <ul style="list-style-type: none"> • during operation acc. to IEC 60721 • during storage acc. to IEC 60721 • during transport acc. to IEC 60721 	<p>3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4</p> <p>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)</p>
EMC emitted interference	acc. to IEC 60947-4-2: Class A

Communication/ Protocol

Communication module is supported	
--	--

- PROFINET standard
- EtherNet/IP
- Modbus RTU
- Modbus TCP
- PROFIBUS

Yes
Yes
Yes
Yes
Yes

UL/CSA ratings

Manufacturer's article number

• of circuit breaker

— usable for Standard Faults at 460/480 V according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; I_q = 10 kA

— usable for High Faults at 460/480 V according to UL

Siemens type: 3VA51, max. 125 A; I_q max = 65 kA

— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL

Siemens type: 3VA51, max. 125 A; I_q = 10 kA

— usable for High Faults at 460/480 V at inside-delta circuit according to UL

Siemens type: 3VA51, max. 125 A; I_q max = 65 kA

— usable for Standard Faults at 575/600 V according to UL

Siemens type: 3RV2742, max. 70 A or 3VA51, max. 125 A; I_q = 10 kA

— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL

Siemens type: 3VA51, max. 125 A; I_q = 10 kA

• of the fuse

— usable for Standard Faults up to 575/600 V according to UL

Type: Class RK5 / K5, max. 200 A; I_q = 10 kA

— usable for High Faults up to 575/600 V according to UL

Type: Class J / L, max. 225 A; I_q = 100 kA

— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class RK5 / K5, max. 200 A; I_q = 10 kA

— usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class J / L, max. 225 A; I_q = 100 kA

Operating power [hp] for three-phase motors

• at 200/208 V at 50 °C rated value

15 hp

• at 220/230 V at 50 °C rated value

20 hp

• at 460/480 V at 50 °C rated value

40 hp

• at 575/600 V at 50 °C rated value

50 hp

• at 200/208 V at inside-delta circuit at 50 °C rated value

30 hp

• at 220/230 V at inside-delta circuit at 50 °C rated value

30 hp

• at 460/480 V at inside-delta circuit at 50 °C rated value

75 hp

• at 575/600 V at inside-delta circuit at 50 °C rated value

75 hp

Contact rating of auxiliary contacts according to UL

R300-B300

Safety related data

Electromagnetic compatibility

in accordance with IEC 60947-4-2

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
 CCC	 EAC	 EG-Konf.
 CSA	 RCM	
 UL		

Declaration of Conformity	Test Certificates	Marine / Shipping
Miscellaneous	Type Test Certificates/Test Report	 ABS
		 LRS
		 PRS
		 DNV-GL DNVGL.COM/AF

other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/ic10

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5225-3AC15>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5225-3AC15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5225-3AC15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5225-3AC15&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5225-3AC15/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5225-3AC15&objecttype=14&gridview=view1>

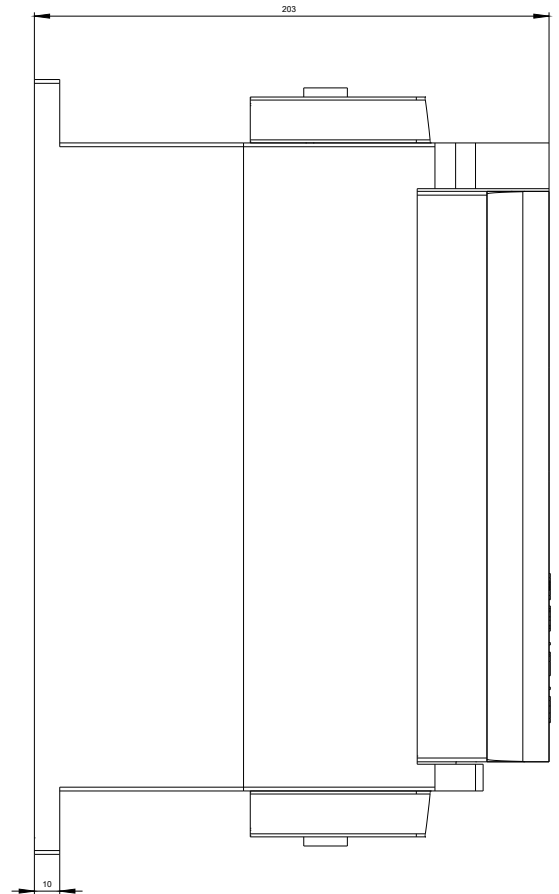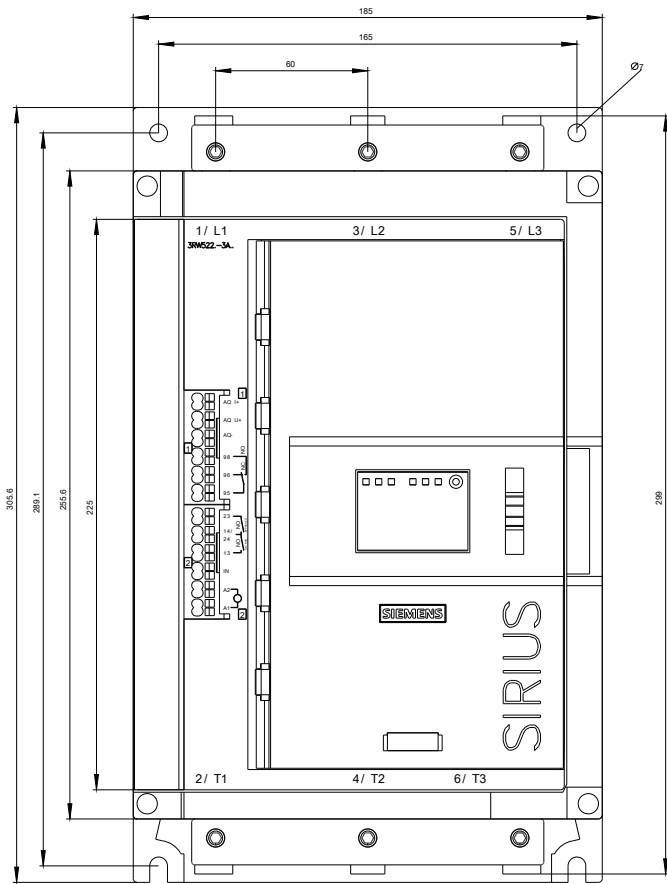

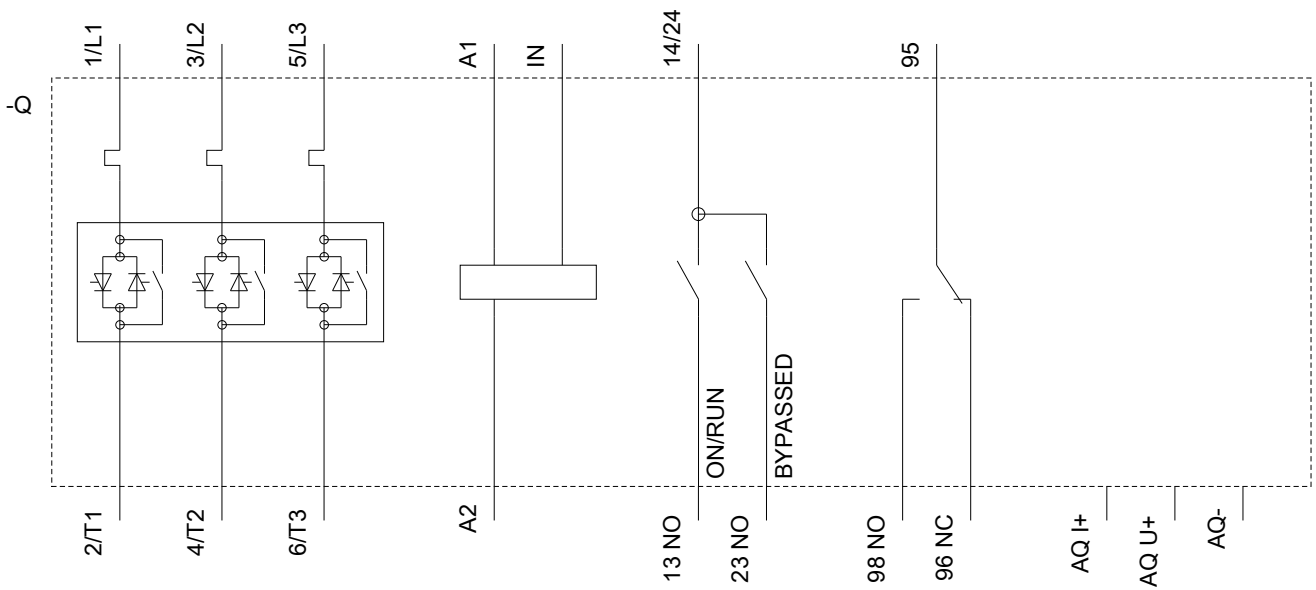

last modified:

01/23/2020