

Article No. : 6SL3230-1YE28-0AP0



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

#### Input

Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -20 %
Line frequency	47 ... 63 Hz

**Rated voltage** 400V IEC 480V NEC

Rated current (LO)	29.50 A	26.00 A
Rated current (HO)	24.50 A	21.30 A

#### Output

Number of phases 3 AC

**Rated voltage** 400V IEC 480V NEC

Rated power (LO)	15.00 kW	20.00 hp
Rated power (HO)	11.00 kW	15.00 hp
Rated current (LO)	32.00 A	27.00 A
Rated current (HO)	26.00 A	21.00 A
Rated current (IN)	33.00 A	
Max. output current	43.00 A	

Pulse frequency	4 kHz
Output frequency for vector control	0 ... 200 Hz
Output frequency for V/f control	0 ... 550 Hz

#### Overload capability

##### Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

##### High Overload (HO)

150% x base load current IH for 60 s within a 600 s cycle time

### General tech. specifications

Power factor $\lambda$	0.70 ... 0.85
Offset factor $\cos \phi$	0.96
Efficiency $\eta$	0.98
Sound pressure level (1m)	67 dB
Power loss	0.396 kW
Filter class (integrated)	RFI suppression filter for Category C2
EMC category (with accessories)	Category C2

### Ambient conditions

Standard board coating type Class 3C3, according to IEC 60721-3-3: 2002

Cooling Air cooling using an integrated fan

Cooling air requirement 0.018 m<sup>3</sup>/s (0.653 ft<sup>3</sup>/s)

Installation altitude 1,000 m (3,280.84 ft)

#### Ambient temperature

Operation	-20 ... 45 °C (-4 ... 113 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

#### Relative humidity

Max. operation 95 % At 40 °C (104 °F), condensation and icing not permissible

### Mechanical data

Degree of protection	IP20 / UL open type
Size	FSC
Net weight	7.66 kg (16.89 lb)
Width	140 mm (5.51 in)
Height	295 mm (11.61 in)
Depth	218 mm (8.58 in)

## Data sheet for SINAMICS G120X

Article No. : 6SL3230-1YE28-0AP0

### Inputs / outputs

#### Standard digital inputs

Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA

#### Fail-safe digital inputs

Number	1
--------	---

#### Digital outputs

Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0

#### Analog / digital inputs

Number	2 (Differential input)
Resolution	10 bit

#### Switching threshold as digital input

0 → 1	4 V
1 → 0	1.6 V

#### Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy  $\pm 5$  °C

### Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	Yes
Torque control, with encoder	No

### Communication

Communication	PROFIBUS DP
---------------	-------------

### Connections

#### Signal cable

Conductor cross-section	0.15 ... 1.50 mm <sup>2</sup> (AWG 24 ... AWG 16)
-------------------------	--

#### Line side

Version	screw-type terminal
Conductor cross-section	1.50 ... 16.00 mm <sup>2</sup> (AWG 16 ... AWG 6)

#### Motor end

Version	Screw-type terminals
Conductor cross-section	1.50 ... 16.00 mm <sup>2</sup> (AWG 16 ... AWG 6)

#### DC link (for braking resistor)


PE connection	On housing with M4 screw
---------------	--------------------------

#### Max. motor cable length

Shielded	150 m (492.13 ft)
----------	-------------------

### Converter losses to EN 50598-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-35.9 %

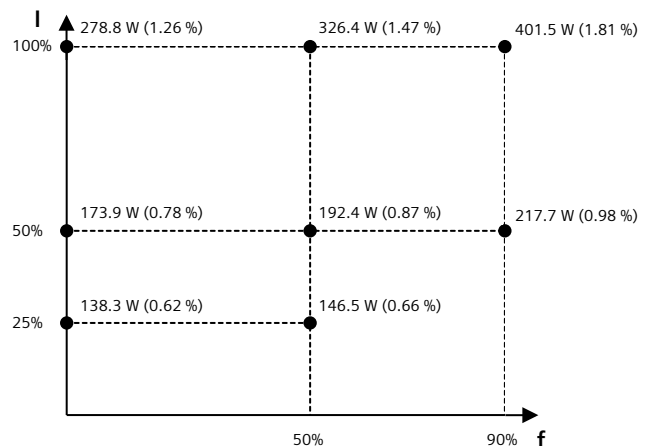

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

### Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC



Data sheet for SINAMICS G120X

Article No. : 6SL3230-1YE28-0AP0