

MOTION CONNECT 500

MLFB-Ordering data

6FX5002-5CS02-1BD0

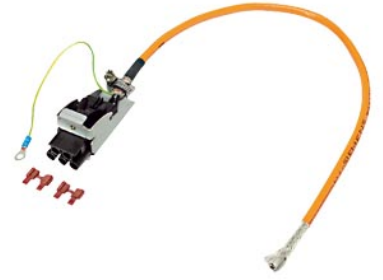


Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Electrical data

No. of cores x cross-section mm ²	4x1.5 C
Test voltage, rms Power conductors	4.0 kV
Test voltage, rms Signal conductors	2.0 kV
Type with braking lead	No
Rated voltage V0/V according to EN 50395	600 V/1000 V

Mechanical data

Type of connection cable engine side	Open end of lead
Connector size	not relevant
Type of bolting	not relevant
Type of connection cable converter side	Connector SINAMICS S120 Booksize MoMo
Maximum cable outer diameter	8.4 mm
Length	13.0 m
Weight (without connector)	1.6 kg

Static deployment

Smallest bending radius (fixed installation)	42.0 mm
Tensile load for permanently installed cable, max.	50 N/mm ² (7252 lbf/in ²)
Torsional stress	Absolute 30°/m

Dynamic deployment

Smallest bending radius(flexible installation in a cable carriers)	155.0 mm
Acceleration horizontal, max	2 m/s ²
Maximum traversing velocity	30 m/min
Travel path	5 m
Number of bends, max.	100,000
Tensile load for moving cable, max.	20 N/mm ² (2901 lbf/in ²)

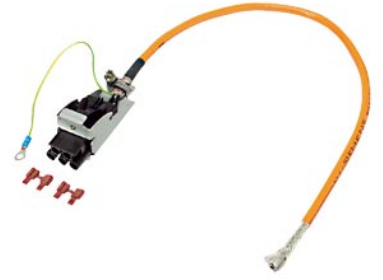


Figure similar

MLFB-Ordering data

6FX5002-5CS02-1BD0

Technical data

Ambient temperature

Operation with permanently installed cable	-20 ... 80 °C
	Module-end power connector 0 ... 55°C
Operation with moving cable	0 ... 60 °C
	Motor-end power connector 0 ... 55°C
Storage	-20 ... 80 °C
	Module-end power connector -20 ... 70°C
Kind of connection cable	Basis cable
Material of the cable sheath	PVC DESINA color orange RAL 2003
Type of insulation	CFC/silicone-free
Standard for behavior in fire: flame resistance	EN 60332-1-1 to 1-3
Oil resistance	EN 60811-2-1 (mineral oil only)
Verification of suitability as authorisation for USA	UL758
Verification of suitability as authorisation for Canada	CSA-C22.2-N.210.2-M90