



Figure similar

MLFB-Ordering data

6SL3220-2YE44-0AF0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data

Input

| | | |
|--------------------|---------------------------|----------|
| Number of phases | 3 AC | |
| Line voltage | 380 ... 480 V +10 % -20 % | |
| Line frequency | 47 ... 63 Hz | |
| Rated voltage | 400V IEC | 480V NEC |
| Rated current (LO) | 177.00 A | 151.00 A |
| Rated current (HO) | 154.00 A | 132.00 A |

Output

| | | |
|-------------------------------------|--------------|-----------|
| Number of phases | 3 AC | |
| Rated voltage | 400V IEC | 480V NEC |
| Rated power (LO) | 90.00 kW | 125.00 hp |
| Rated power (HO) | 75.00 kW | 75.00 hp |
| Rated current (LO) | 178.00 A | 156.00 A |
| Rated current (HO) | 145.00 A | 124.00 A |
| Rated current (IN) | 183.00 A | |
| Max. output current | 241.00 A | |
| Pulse frequency | 4 kHz | |
| Output frequency for vector control | 0 ... 200 Hz | |
| Output frequency for V/f control | 0 ... 550 Hz | |

General tech. specifications

| | |
|------------------------------|--|
| Power factor λ | 0.90 ... 0.95 |
| Offset factor $\cos \varphi$ | 0.99 |
| Efficiency η | 0.98 |
| Sound pressure level (1m) | 72 dB |
| Power loss | 1.570 kW |
| Filter class (integrated) | RFI suppression filter for Category C2 |

Ambient conditions

| | |
|-----------------------------|--|
| Standard board coating type | Class 3C2, according to IEC 60721-3-3: 2002 |
| Cooling | Air cooling using an integrated fan |
| Cooling air requirement | 0.153 m ³ /s (5.403 ft ³ /s) |
| Installation altitude | 1000 m (3280.84 ft) |
| Ambient temperature | |
| Operation | -20 ... 45 °C (-4 ... 113 °F) |
| Transport | -40 ... 70 °C (-40 ... 158 °F) |
| Storage | -25 ... 55 °C (-13 ... 131 °F) |

Relative humidity

| | |
|----------------|--|
| Max. operation | 95 % At 40 °C (104 °F), condensation and icing not permissible |
|----------------|--|

Overload capability

Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)

150% x base load current IH for 60 s within a 600 s cycle time



Figure similar

MLFB-Ordering data

6SL3220-2YE44-0AF0

Mechanical data

| | |
|----------------------|---------------------|
| Degree of protection | IP20 / UL open type |
| Size | FSF |
| Net weight | 68 kg (149.91 lb) |
| Width | 305 mm (12.01 in) |
| Height | 709 mm (27.91 in) |
| Depth | 360 mm (14.17 in) |

Inputs / outputs

Standard digital inputs

| | |
|----------------------|-------|
| Number | 6 |
| Switching level: 0→1 | 11 V |
| Switching level: 1→0 | 5 V |
| Max. inrush current | 15 mA |

Fail-safe digital inputs

| | |
|--------|---|
| Number | 1 |
|--------|---|

Digital outputs

| | |
|------------------------------------|----------------|
| Number as relay changeover contact | 2 |
| Output (resistive load) | DC 30 V, 5.0 A |
| Number as transistor | 0 |

Analog / digital inputs

| | |
|------------|------------------------|
| Number | 2 (Differential input) |
| Resolution | 10 bit |

Switching threshold as digital input

| | |
|-----|-------|
| 0→1 | 4 V |
| 1→0 | 1.6 V |

Analog outputs

| | |
|--------|-------------------------|
| Number | 1 (Non-isolated output) |
|--------|-------------------------|

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C

Closed-loop control techniques

| | |
|---|-----|
| V/f linear / square-law / parameterizable | Yes |
| V/f with flux current control (FCC) | Yes |
| V/f ECO linear / square-law | Yes |
| Sensorless vector control | Yes |
| Vector control, with sensor | No |
| Encoderless torque control | Yes |
| Torque control, with encoder | No |

Communication

| | |
|---------------|-----------------------|
| Communication | PROFINET, EtherNet/IP |
|---------------|-----------------------|

Connections

Signal cable

| | |
|-------------------------|--|
| Conductor cross-section | 0.15 ... 1.50 mm ² (AWG 24 ... AWG 16) |
|-------------------------|--|

Line side

| | |
|-------------------------|---|
| Version | M10 screw |
| Conductor cross-section | 35.00 ... 120.00 mm ² (AWG 1 ... AWG 4/0) |

Motor end

| | |
|-------------------------|---|
| Version | M10 screw |
| Conductor cross-section | 35.00 ... 120.00 mm ² (AWG 1 ... AWG 4/0) |

DC link (for braking resistor)

| | |
|---------------|-----------|
| PE connection | M10 screw |
|---------------|-----------|

Max. motor cable length

| | |
|------------|--------------------|
| Shielded | 300 m (984.25 ft) |
| Unshielded | 450 m (1476.38 ft) |




Figure similar

MLFB-Ordering data

6SL3220-2YE44-0AF0

Converter losses to EN 50598-2*

| | |
|--|----------|
| Efficiency class | IE2 |
| Comparison with the reference converter (90% / 100%) | -51.40 % |

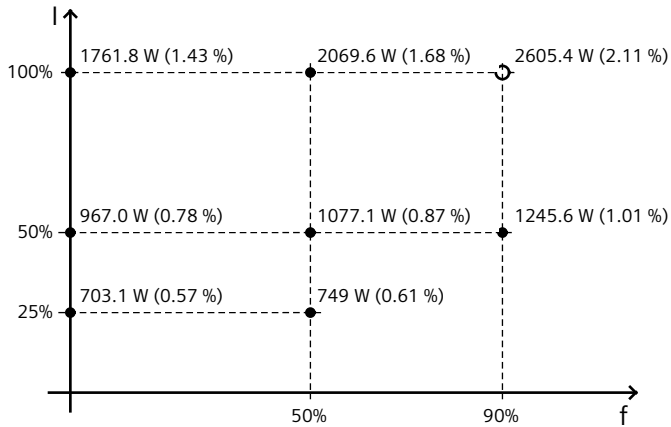

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Standards

Compliance with standards UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH

CE marking

EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Operator panel: Basic Operator Panel (BOP-2)

Screen

Display design LCD, monochrome

Ambient conditions

Ambient temperature during

Operation 0 ... 50 °C (32 ... 122 °F)

Storage -40 ... 70 °C (-40 ... 158 °F)

Transport -40 ... 70 °C (-40 ... 158 °F)

Mechanical data

Degree of protection IP55 / UL type 12

Net weight 0.14 kg (0.31 lb)

Width 70.0 mm (2.76 in)

Height 106.85 mm (4.21 in)

Depth 19.60 mm (0.77 in)

Relative humidity at 25°C during

Max. operation 95 %

Approvals

Certificate of suitability CE, cULus, EAC, KCC, RCM