



circuit breaker 3VA5 UL Frame 800 breaking capacity class H 65 kA @ 480 V 3-pole, line protection TM230, FTAM, In=700 A overload protection, 100%-rated Ir=700 A permanently set short-circuit protection Ii=5...10 x In cable connection on two sides

| Model | |
|--|-----------------------------|
| product brand name | SENTRON |
| product designation | Molded-case circuit breaker |
| product designation / according to UL file | HMAS |
| design of the product | System protection |
| design of the load switch / according to UL 489 / Heating, Air Conditioning, and Refrigeration circuit breaker (HACR Type) | Yes |
| design of the load switch / according to UL 489 / High-Intensity-Discharge circuit breaker (HID Type) | No |
| design of the load switch / according to UL 489 / Switching Duty circuit breaker (SWD Type) | No |
| design of the overcurrent release | TM230 |
| protection function of the overcurrent release | LI |
| number of poles | 3 |
| General technical data | |
| insulation voltage / rated value | 800 V |
| operating voltage / at DC / rated value | 750 V |
| operating voltage / at AC / rated value | 690 V |
| power loss [W] / maximum | 183 W |
| power loss [W] / for rated value of the current / at AC / in hot operating state / per pole | 61 W |
| mechanical service life (operating cycles) / typical | 10 000 |
| electrical endurance (operating cycles) / at AC-1 / at 380/415 V | 4 800 |
| electrical endurance (operating cycles) / at AC-1 / at 690 V | 3 300 |
| electrical endurance (operating cycles) / at 480 V | 4 800 |
| electrical endurance (operating cycles) / at 600 V | 3 300 |
| product feature / for neutral conductors / upgradable/retrofitable / short-circuit and overload proof | No |
| product function | |
| • communication function | No |
| • other measurement function | No |
| Net Weight | 14.586 kg |
| Current | |
| marking / according to UL 489 / 100%-rated breaker | Yes |
| operational current | |
| • at 40 °C | 700 A |
| • at 45 °C | 680 A |
| • at 50 °C | 659 A |
| • at 55 °C | 639 A |
| • at 60 °C | 619 A |
| • at 65 °C | 599 A |
| • at 70 °C | 578 A |

Switching capacity according to IEC 60947

| | |
|--|--|
| switching capacity class of the circuit breaker | H |
| maximum short-circuit current breaking capacity (I _{cu}) | |
| • at 240 V | 100 kA |
| • at 415 V | 70 kA |
| • at 690 V | 35 kA |
| operating short-circuit current breaking capacity (I _{cs}) | |
| • at 240 V | 100 kA |
| • at 415 V | 70 kA |
| • at 690 V | 19 kA |
| short-circuit current making capacity (I _{cm}) | |
| • at 240 V | 220 kA |
| • at 415 V | 154 kA |
| • at 690 V | 73.5 kA |
| design of short-circuit protection | For switching power values in DC networks, see the 3VA molded case circuit breaker device manual; link to be found under Service & Support in the last chapter |

Switching capacity according to UL 489

| | |
|---------------------------|--------|
| current breaking capacity | |
| • at 240 V | 100 kA |
| • at 480 V | 65 kA |
| • at 600 V | 25 kA |

Adjustable parameters

| | |
|---|---------|
| adjustable response value setting current (I _r) / of the L-trip / with I _{2t} characteristic | |
| • minimum | 700 A |
| • maximum | 700 A |
| adjustable response value delay time (t _r) / for L-tripping / with I _{2t} characteristic | |
| • minimum | 1 s |
| • maximum | 1 s |
| adjustable response value setting current (I _i) / for I-tripping | |
| • minimum | 3 500 A |
| • maximum | 7 000 A |
| adjustable setting current (I _{nN}) / for N-tripping | |
| • minimum | 0 A |
| • maximum | 0 A |
| product function / grounding protection | No |

Mechanical Design

| | |
|------------------------|----------|
| product component | |
| • undervoltage release | No |
| • voltage trigger | No |
| • trip indicator | No |
| height [in] | 12.91 in |
| height | 328 mm |
| width [in] | 8.27 in |
| width | 210 mm |
| depth [in] | 4.72 in |
| depth | 120 mm |

Connections

| | |
|---|---|
| arrangement of electrical connectors / for main current circuit | Front connection |
| type of electrical connection / for main current circuit | circular conductor terminal on both sides |
| design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6) | silver |

Auxiliary circuit

| | |
|--|---|
| number of CO contacts / for auxiliary contacts | 0 |
|--|---|

Accessories

| | |
|--|----------------------------------|
| product extension / optional / motor drive | No |
| manufacturer's article number | |
| • of the supplied basic switch | 3VA55706EC362AA0 |

Environmental conditions

| | |
|------------------------------------|------|
| protection class IP / on the front | IP40 |
|------------------------------------|------|

| | |
|---|--------|
| ambient temperature | |
| • during operation / minimum | -25 °C |
| • during operation / maximum | 70 °C |
| • during storage / minimum | -40 °C |
| • during storage / maximum | 80 °C |
| reference code / according to IEC 81346-2 | Q |

Approvals / Certificates

| | |
|--------------------------|-----|
| General Product Approval | EMV |
|--------------------------|-----|



Miscellaneous



| | | | |
|-------------------|----------------------|-------|-------------|
| Test Certificates | Maritime application | other | Environment |
|-------------------|----------------------|-------|-------------|

[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA5570-6EC36-2AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA5570-6EC36-2AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA5570-6EC36-2AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

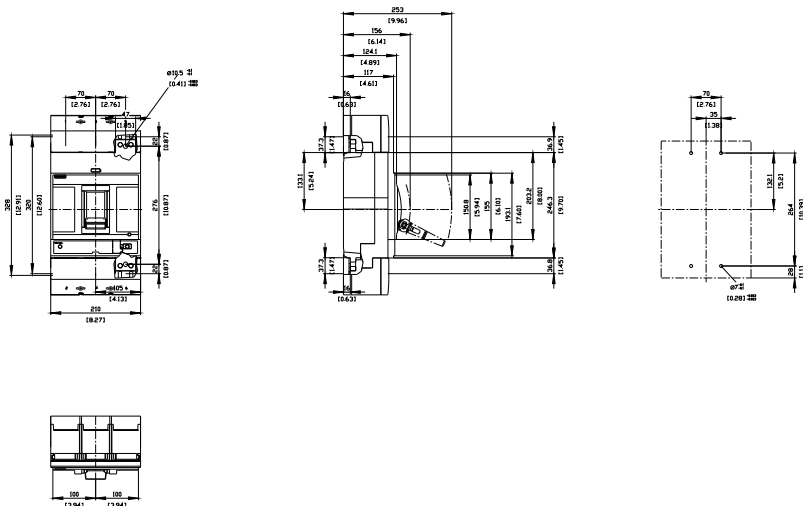



last modified:

3/31/2025

