

Solid-state contactor 3-phase 3RF2 AC 51 / 10 A / 40 °C 48-600 V / 230 V AC 2-phase controlled Spring-type terminal Blocking voltage 1200 V



Product brand name	SIRIUS
Product designation	solid-state contactor
Product type designation	3RF24

General technical data

Product function	zero-point switching
Power loss [W] / for rated value of the current / at AC / in hot operating state	23 W
Insulation voltage	600 V
• rated value	
Degree of pollution	3
Protection class IP	IP20
Shock resistance / acc. to IEC 60068-2-27	15g / 11 ms
Vibration resistance / acc. to IEC 60068-2-6	2g
Reference code / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750	K
Reference code / acc. to DIN EN 81346-2	Q
Reference code / acc. to DIN EN 61346-2	Q

Main circuit

Number of poles / for main current circuit	3
--	---

Number of NO contacts / for main contacts	2
Number of NC contacts / for main contacts	0
Operating voltage / at AC	
• at 50 Hz / rated value	48 ... 600 V
• at 60 Hz / rated value	48 ... 600 V
Operating frequency / rated value	50 ... 60 Hz
Relative symmetrical tolerance / of the operating frequency	10 %
Operating range relative to the operating voltage / at AC	
• at 50 Hz	40 ... 660 V
• at 60 Hz	40 ... 660 V
Operating current	
• at AC-51 / rated value	10.5 A
Operating current / minimum	100 mA
Rate of voltage rise / at the thyristor / for main contacts / maximum permissible	500 V/μs
Blocking voltage / at the thyristor / for main contacts / maximum permissible	1 200 V
Reverse current / of the thyristor	10 mA
Derating temperature	40 °C
Surge current resistance / rated value	200 A
I²t value / maximum	200 A ² ·s

Control circuit/ Control	
Type of voltage / of the control supply voltage	AC
Control supply voltage / 1 / at AC	
• at 50 Hz	180 ... 230 V
• at 60 Hz	180 ... 230 V
Control supply voltage frequency	
• 1 / rated value	45 Hz
• 2 / rated value	66 Hz
Control supply voltage / at AC	
• at 50 Hz / Full-scale value for signal<0> recognition	40 V
• at 60 Hz / Full-scale value for signal<0> recognition	180 V
Control supply voltage	
• at AC / initial value for signal <1> detection	180 V
Symmetrical line frequency tolerance	5 Hz
Control current / at minimum control supply voltage	
• at AC	2 mA
Control current / at AC / rated value	15 mA
Switch-on delay time	40 ms; additionally max. one half-wave

Number of NC contacts / for auxiliary contacts	0
Number of NO contacts / for auxiliary contacts	0
Number of CO contacts / for auxiliary contacts	0

Installation/ mounting/ dimensions

Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
• Side-by-side mounting	Yes
Height	100 mm
Width	45 mm
Depth	95.5 mm; 104.5 mm product version E01
Installation altitude / at height above sea level / maximum	1 000 m

Connections/ Terminals

Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 ... 2.5 mm ²)
— finely stranded / with core end processing	2x (0.5 ... 1.5 mm ²)
— finely stranded / without core end processing	2x (0.5 ... 2.5 mm ²)
• at AWG conductors / for main contacts	2x (18 ... 14)
Type of connectable conductor cross-sections	
• for auxiliary and control contacts	
— solid	0.5 ... 1.5 mm ²
— finely stranded / with core end processing	0.5 ... 2.5 mm ²
— finely stranded / without core end processing	0.5 ... 2.5 mm ²
• at AWG conductors / for auxiliary and control contacts	1x (AWG 20 ... 12)
Wire stripping length / of the cable	
• for main contacts	10 mm
• for auxiliary and control contacts	10 mm

Ambient conditions

Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Electromagnetic compatibility

Conducted interference	
• due to burst / acc. to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2
• due to conductor-earth surge / acc. to IEC 61000-4-5	2 kV behavior criterion 2
• due to conductor-conductor surge / acc. to IEC 61000-4-5	1 kV behavior criterion 2

<ul style="list-style-type: none"> • due to high-frequency radiation / acc. to IEC 61000-4-6 	140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
Electrostatic discharge / acc. to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
Conducted HF-interference emissions / acc. to CISPR11	Class A for industrial environment
Field-bound HF-interference emission / acc. to CISPR11	Class A for industrial environment

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2410-2AB55>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2410-2AB55>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2410-2AB55>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2410-2AB55&lang=en

Short-circuit protection, design of the fuse link

https://www.automation.siemens.com/cd-static/material/info/3RF20_eng.pdf

Short-circuit protection, design of the fuse link

https://www.automation.siemens.com/cd-static/material/info/3RF21_eng.pdf

Short-circuit protection, design of the fuse link



https://www.automation.siemens.com/cd-static/material/info/3RF22_eng.pdf


Short-circuit protection, design of the fuse link


https://www.automation.siemens.com/cd-static/material/info/3RF23_eng.pdf

Short-circuit protection, design of the fuse link

https://www.automation.siemens.com/cd-static/material/info/3RF24_eng.pdf

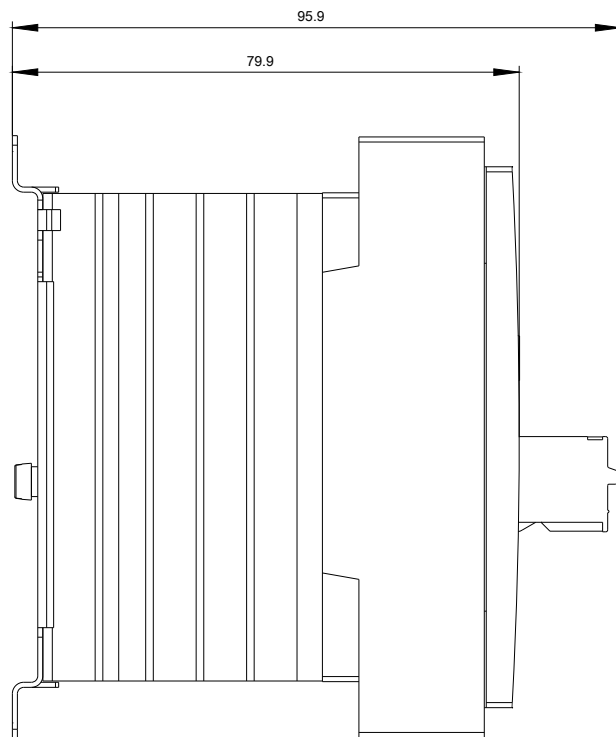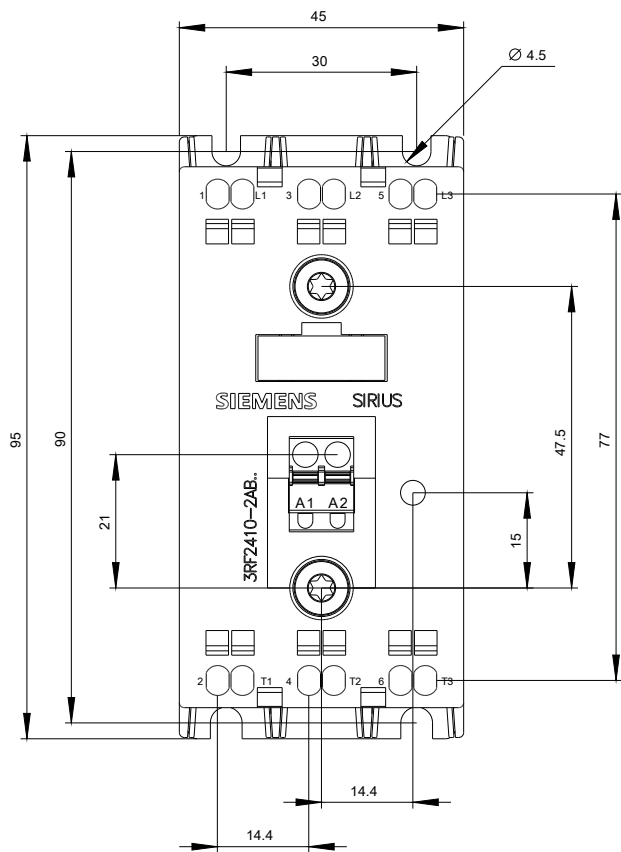

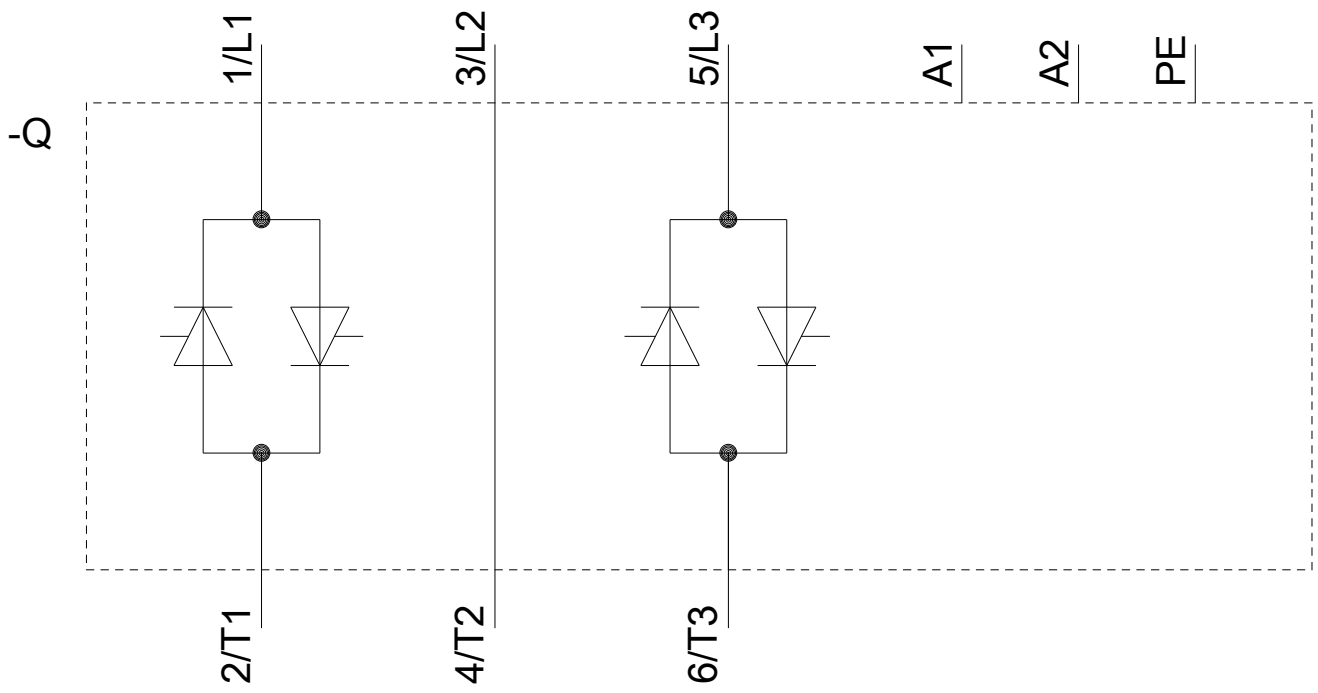

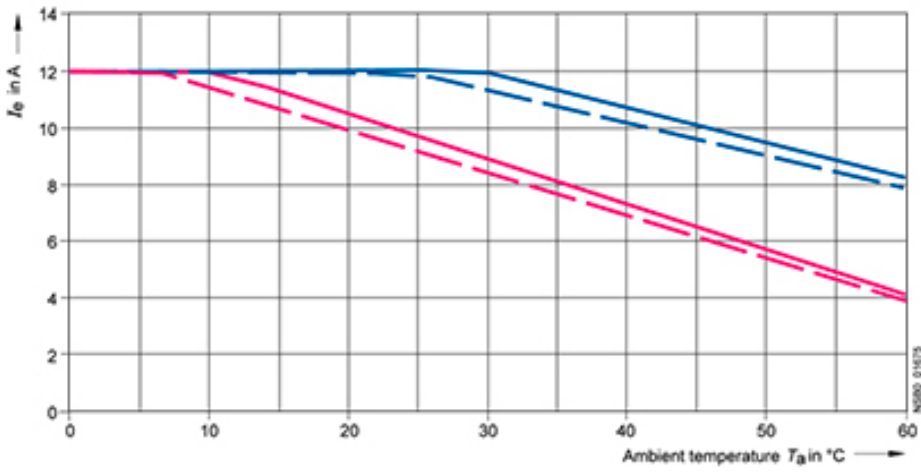

- I_{max} Thermal limit current for individual mounting
- - I_{max} Thermal limit current for side-by-side mounting
- I_{IEC} Current according to IEC 947-4-3 for individual mounting
- - I_{IEC} Current according to IEC 947-4-3 for side-by-side mounting

